


SUPERNOVA 150

Datasheet

DC Connectors	CCS2+CCS2 / CCS2+CHAdeMO
Charging Protocol	ISO15118, DIN SPEC 70121, CHAdeMO
Cable Length	3 m, 5 m ^[1] (specific length upon request)
Cable Management	Ideal for 5 m retracting the cable to its initial position, retrofittable ^[1]
Output Power	150 kW
Nominal Efficiency	95%
Power Factor	>0.98
THD	5%
Standby Consumption	<50 W
Output Voltage	150-1000 V
Output Current	400 A
Supply Input Voltage Range	400 V $\pm$ 10%, 50-60 Hz
Supply Input Current	230 A at 150 kW DC output power
Electrical Protections	Grid disconnection, Surge Arrestor, per output: MCB, RCD Type A
Dynamic Power Distribution	Simultaneous charge of 2 outputs (75/75 kW down to 60/90 kW)
Environmental Ratings	IP54, IK10, 2000 m altitude
Operating Temperature	-30°C to 50°C
Storage Temperature	-30°C to 70°C
Cooling System	Active air cooling
Operational Noise Level	<65 dBA @ 1 m
Humidity	5% to 95% Non-condensing
Dimension with holster	2000x453x868 mm
Dimension without holster	2000x453x714 mm
Weight	400 kg
Accessibility	Wheelchair access appropriate, Environmental light
Branding Options	Company logos/front surface/full charger vinyling ^[1]
Connectivity	Ethernet, 2G/3G/4G/LTE, Space for external router (DIN rail)
Backend Communication Protocol	OCPP 1.6J
Commissioning Interface	Local (via Ethernet and without extra software) and remote webmanager Schuko 230 V
Diagnostics	Auto-diagnostics system
User Interface	10" Anti-vandal Colour Touch Display (sunlight readable), LED status lights
Authentication	App (OCPP) / RFID (MI-FARE ISO/IEC14443A/B, ISO/IEC15693, ISO/IEC18000-3, FeliCa, NFC)
Ad-Hoc Payment	Credit Card Reader (various options available) ^[1]
Metering	AC MID, DC Meter (per output)
Charging Compliance	CCS (DIN 70121; ISO15118) IEC 61851-1; IEC 61851-23; IEC 61851-21; CHAdeMO 1.2.4
Safety Compliance	CE, IEC
EMC Compliance	CE, IEC

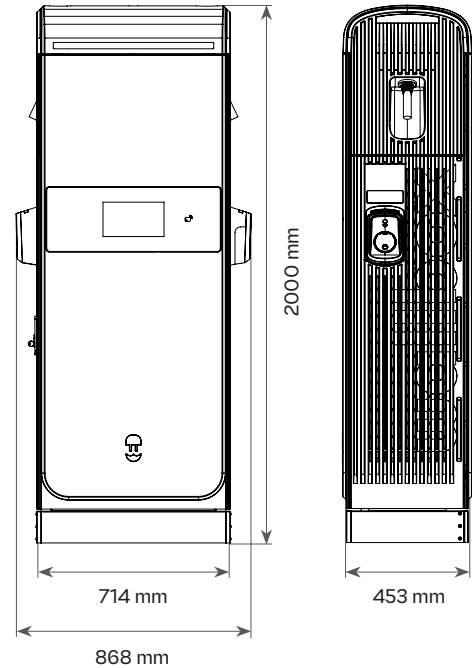

Specifications are subject to change to improve design, function and others.

^[1] Optional.

www.wallbox.com

V.1.1 12/2022